FR1500-WP

Flush-Mounted
RS-485 Fingerprint Reader

Features

- Single gang Standard junction box installation.
- Flush-Mounted Design for neat installation.
- RS-485 Communication Interface.
- BioID Fingerprint Sensor; SilkID Fingerprint Sensor (Optional).
- Stainless Steel Front casing.
- Fingerprint Protective Cover.
- IP65 Waterproof

Specifications

Additional Info
Working Temperature: -10 ℃ ~ 45 ℃
Working Humidity: 20 ~ 95%
Dimensions(LxWxH): 121.3 × 77.3 × 38 mm
Algorithm: ZKFinger v10.0

Power Supply
Operating Voltage 12V DC
Stand-by Mode Power Consumption:12V*60mA=0.72W
Peak Current of Fingerprint scanning:140mA

Hardware
1.0 GHz CPU
ZKBioID Sensor
Buzzer Prompt
Three-color Indicator Light

Compatibility
inBio/inBioPro Controllers
Standalone Fingerprint Devices

Optional Features
125KHz RFID Card
125KHz HID Prox Card
13.56MHz MifareCard(S50 / S70)
13.56MHz HID Iclass Card

Communication
RS485

Configuration

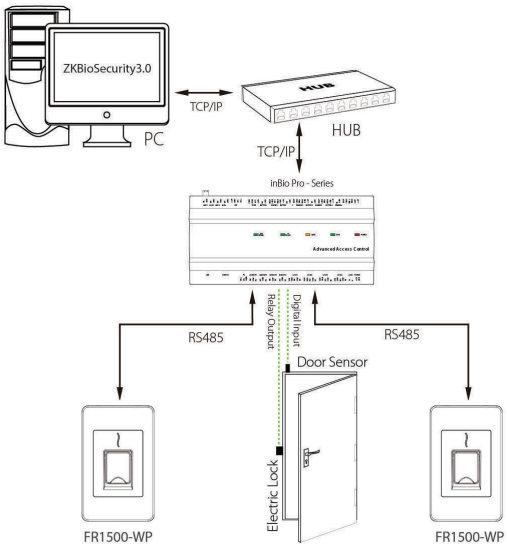

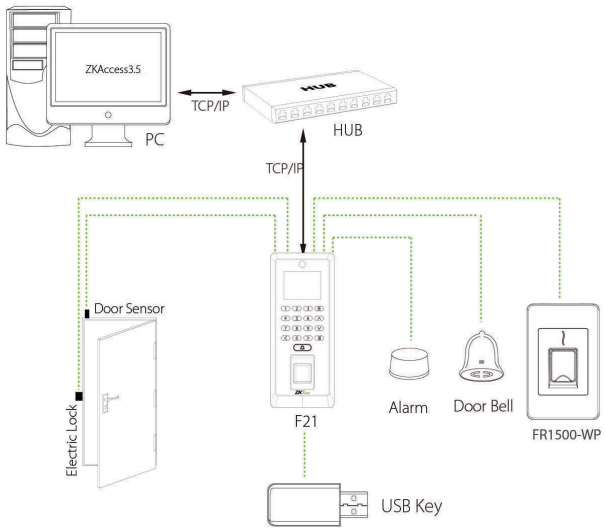

Dimensions (mm)

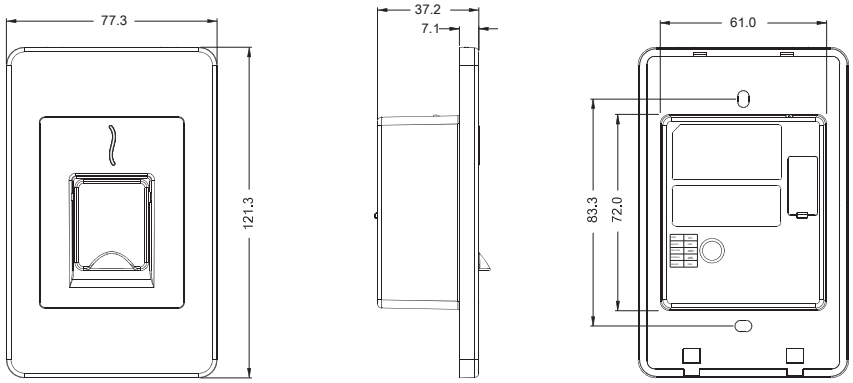

ZKTECO CO.,LTD.
www.zkteco.com
E-mail: sales@zkteco.com

© Copyright 2016. ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.